

J-BLOCK MOUNT



- Dual door design
KEEPS PESTS OUT!
- Most Efficient
- Maintenance Free
- Vents on the Market



Made in USA Patented



Exclusive Benefits Not Found Anywhere Else

CLOSED POSITION (NOT IN OPERATION)

- Birds and other pests cannot enter the "Exclusive Dual Door" design.
- Reduces energy robbing drafts from entering the residence through the vent. Clean look, fully closed design, no place for bees or wasps to nest.

OPEN POSITION (IN OPERATION)


- Most efficient air flow vent in the industry for reduced clothes drying time.
- No screen or guard to collect lint, plug-up and reduce air flow efficiency Reduces dryer fire hazard caused by lint buildup.

MAINTENANCE - ANNUAL DUCT CLEANING RECOMMENDED FOR SAFETY

- Ducts can be cleaned with lint brush from either side.
- Makes multi-story installation cleaning possible from the inside without using ladders.
- Tough U/V resistant plastic resists sunlight and cracking.

J-Block or Wide Mount No-Pest Vent™ vs. Other Exhaust Vents

Air Flow Efficiency

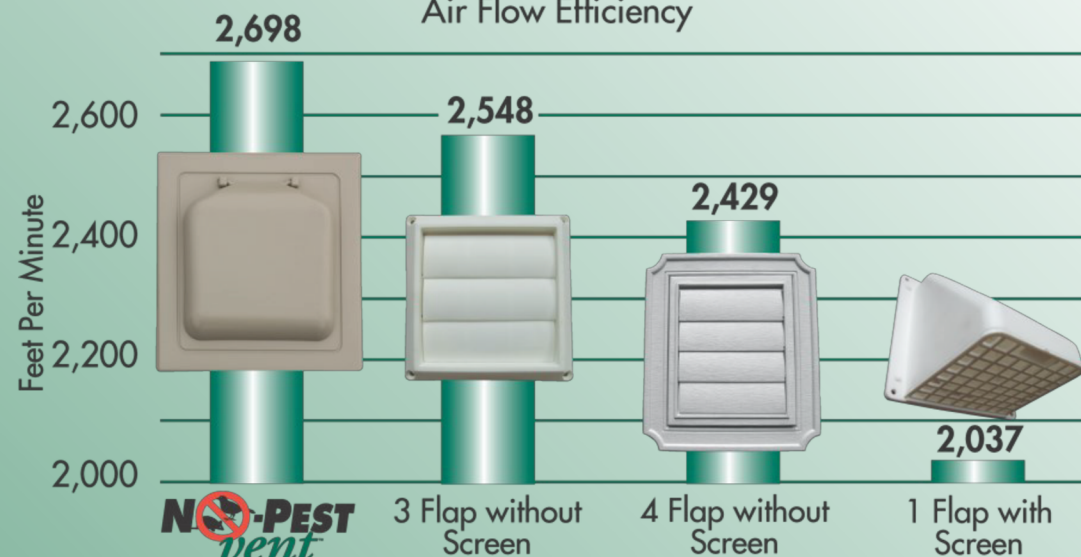



FEATURES

- J-Block accommodates 1/2 to 1 inch thick siding.
- 4 inch diameter 12 inch optional long duct pipe
- Used for clothes dryer, bathroom and stove/range hood exhaust vents



COMPARE THE NO PEST VENT TO OUR COMPETITION

Vents with one-piece flap or 2 to 4 louvers.


- Opening with their beaks, birds quickly build a nest for a well heated home.
- Lint buildup causes unreliable louver closure allowing drafts and easier entry for birds.
- Vents with screen, floating shuttle, or add-on guards for existing vents.
- Require weekly or monthly cleaning of lint buildup. Lint buildup restricts flow which reduces dryer efficiency and creates a fire hazard.



White NPJW



Tan NPJT



Brown NPJB







NO-PEST
vent

504.4 Exhaust installation. Dryer exhaust ducts for clothes dryers shall terminate on the outside of the building and shall be equipped with a backdraft damper. **Screens shall not be installed at the duct termination.** Ducts shall not be connected or installed with sheet metal screws or other fasteners that will obstruct the exhaust flow. Clothes dryer exhaust ducts shall not be connected to a vent connector, vent or chimney. Clothes dryer exhaust ducts shall not extend into or through ducts or plenums.

4" J-Block

Technical Product Specification

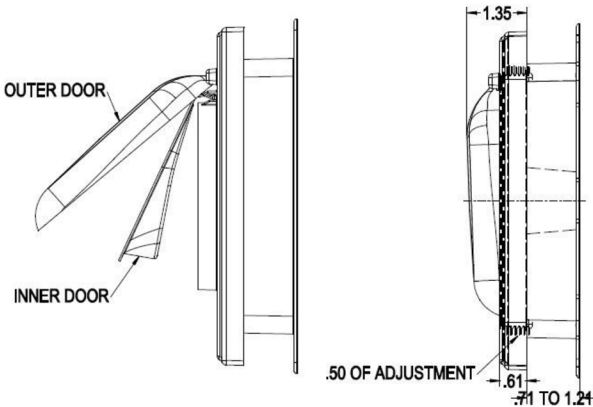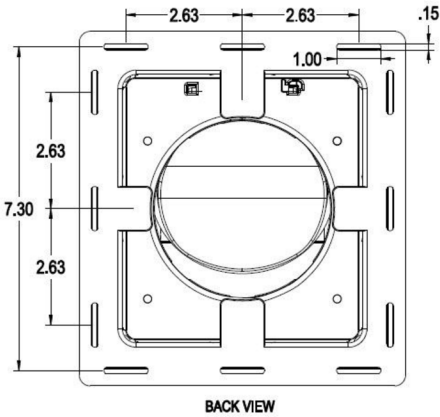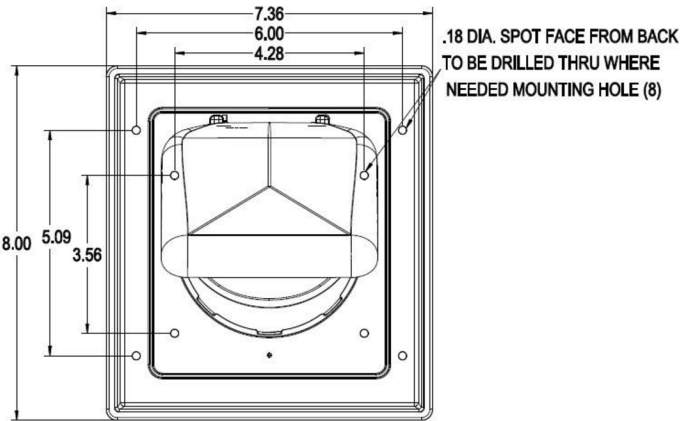

Model No.	Description	Color
4NPJBO- White	4" J-Block No Pipe	White
4NPJBO- Tan	4" J-Block No Pipe	Tan
4NPJBO- Brown	4" J-Block No Pipe	Brown
4NPJBO- Onyx	4" J-Block No Pipe	Onyx

Performance Data

Product Use:

- Dryer Exhaust & Bathroom Exhaust Termination
- Complies w/ IMC 504.4 & IRC 1502.3

Materials:

- USA Sourced 20% Talc Filled Polypropylene
- UV Inhibitor= 15,000 kJ/m2 before failure equal to 10-15 years in Florida sun
- Melting Point: Approx 325° F (163° C)

General Information

Benefits:

- Blocks Birds and other pests from entering exhaust system without the use of cages or screens.
 - Dual door design allows two back draft dampers eliminating the need for an additional back draft damper on the interior and completely seals system from outside air.
 - Eight marked mounting holes for easy installation if not using nail flange
 - Easily snap on to nail flange and adjust to .71 in – 1.21 in
 - Low profile Design
- Dual Door has low back pressure differential and High Exhaust efficiency
- High Grade American Talc Filled Polypropylene

Features:

- Patented Dual Door Design
- Magnetic Door Retention

Manufactured By:

P-tec Products, Inc
248 N Church St.
Zeeland, MI 49464
616-772-0659
Nopestvent.com
Home of the

